

UR18650ZM2 Data Sheet (Tentative)


Apr. 2018

Automotive & Industrial Systems Company of Panasonic Group
Rechargeable Battery Business Division, SANYO Electric Co., Ltd.

Item		Specifications	Notes
Rated Capacity		2420mAh	0.49A(0.2C) discharge at 20°C
Capacity	Minimum	2470mAh	0.49A(0.2C) discharge at 25°C
	Typical	2550mAh	Reference only 0.49A(0.2C) discharge at 25°C
Nominal Voltage		3.6V	0.49A(0.2C) discharge
Discharge End Voltage		2.5V	
Charging Current (Std.)		1.24A(0.5C)	10~+45°C
		0.62A(0.25C)	0~+10°C
Charging Voltage		4.20±0.03V	
Charging Cut Current		49mA(1/50C)	
Continuous Discharge Current (Max.)		8.0A	0~+40°C
Internal Resistance		less than 40mΩ	AC impedance 1 kHz
Weight		less than 46.4g	
Operating Temperature	Charge	0~+45°C	
	Discharge	-20~+60°C	
Storage Conditions (Shipped Charge) SOC30%	Less than 1 month	-20~+50°C	Recoverable Capacity 80%
	Less than 3 months	-20~+40°C	
	Less than 1 year	-20~+20°C	

*1C=2470mAh

TENTATIVE

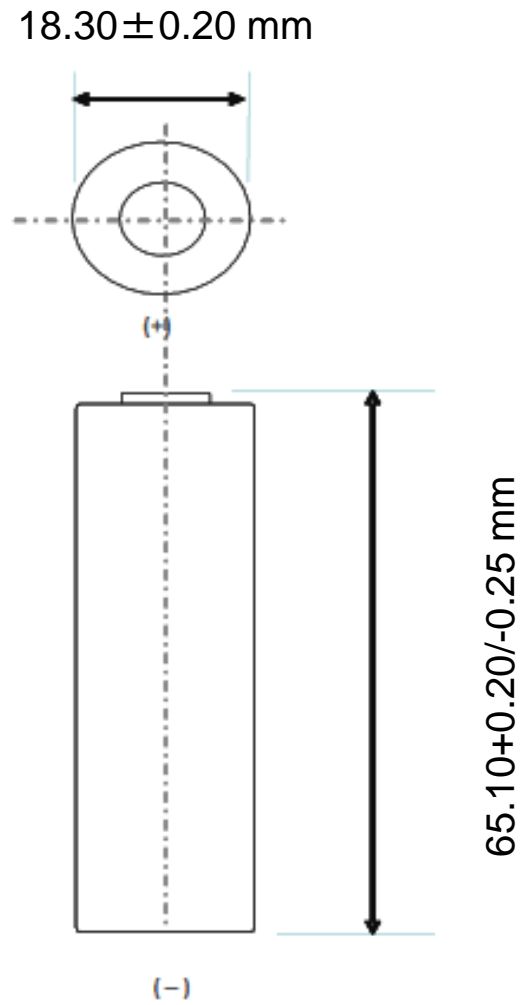


*With tube

TENTATIVE


<For Performance>

Temperature		charging voltage	charging current
0~10°C	(1)	4.20V	② 620mA
	(2)	4.05V	① 1240mA
10~45°C		4.20V	① 1240mA
45~60°C		4.10V	① 1240mA

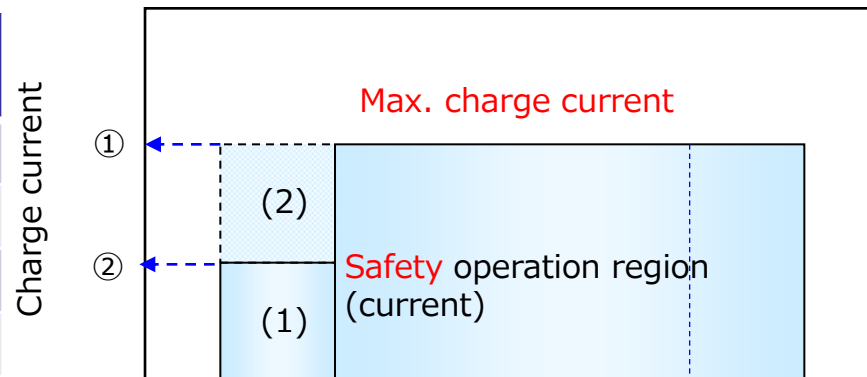

<For safety>


Temperature		Upper limit of charging voltage	Maximum charging current
0~10°C	(1)	4.25V	② 1240mA
	(2)	4.10V	① 2470mA
10~45°C		4.25V	① 2470mA
45~60°C		4.15V	① 2470mA

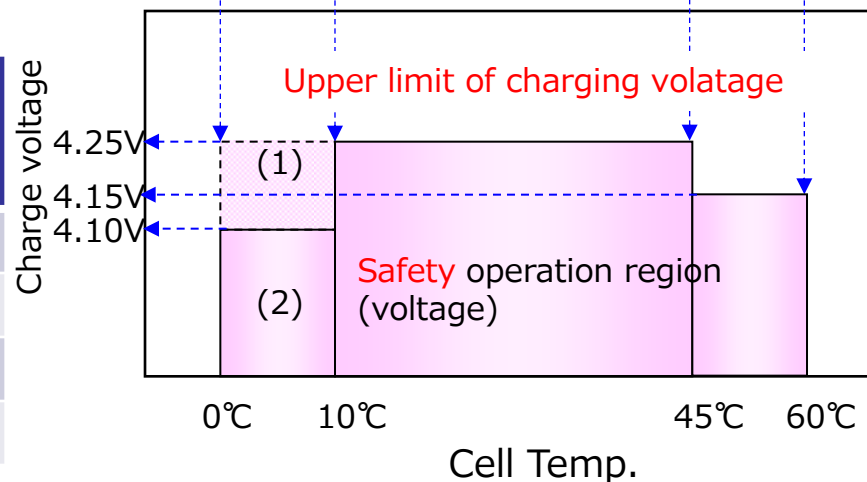

TENTATIVE

Charge: CC-CV: 1240mA-4.2V(49mA cut) at 25°C

Discharge: CC: Variable Current (E.V : 2.50V) at 25°C

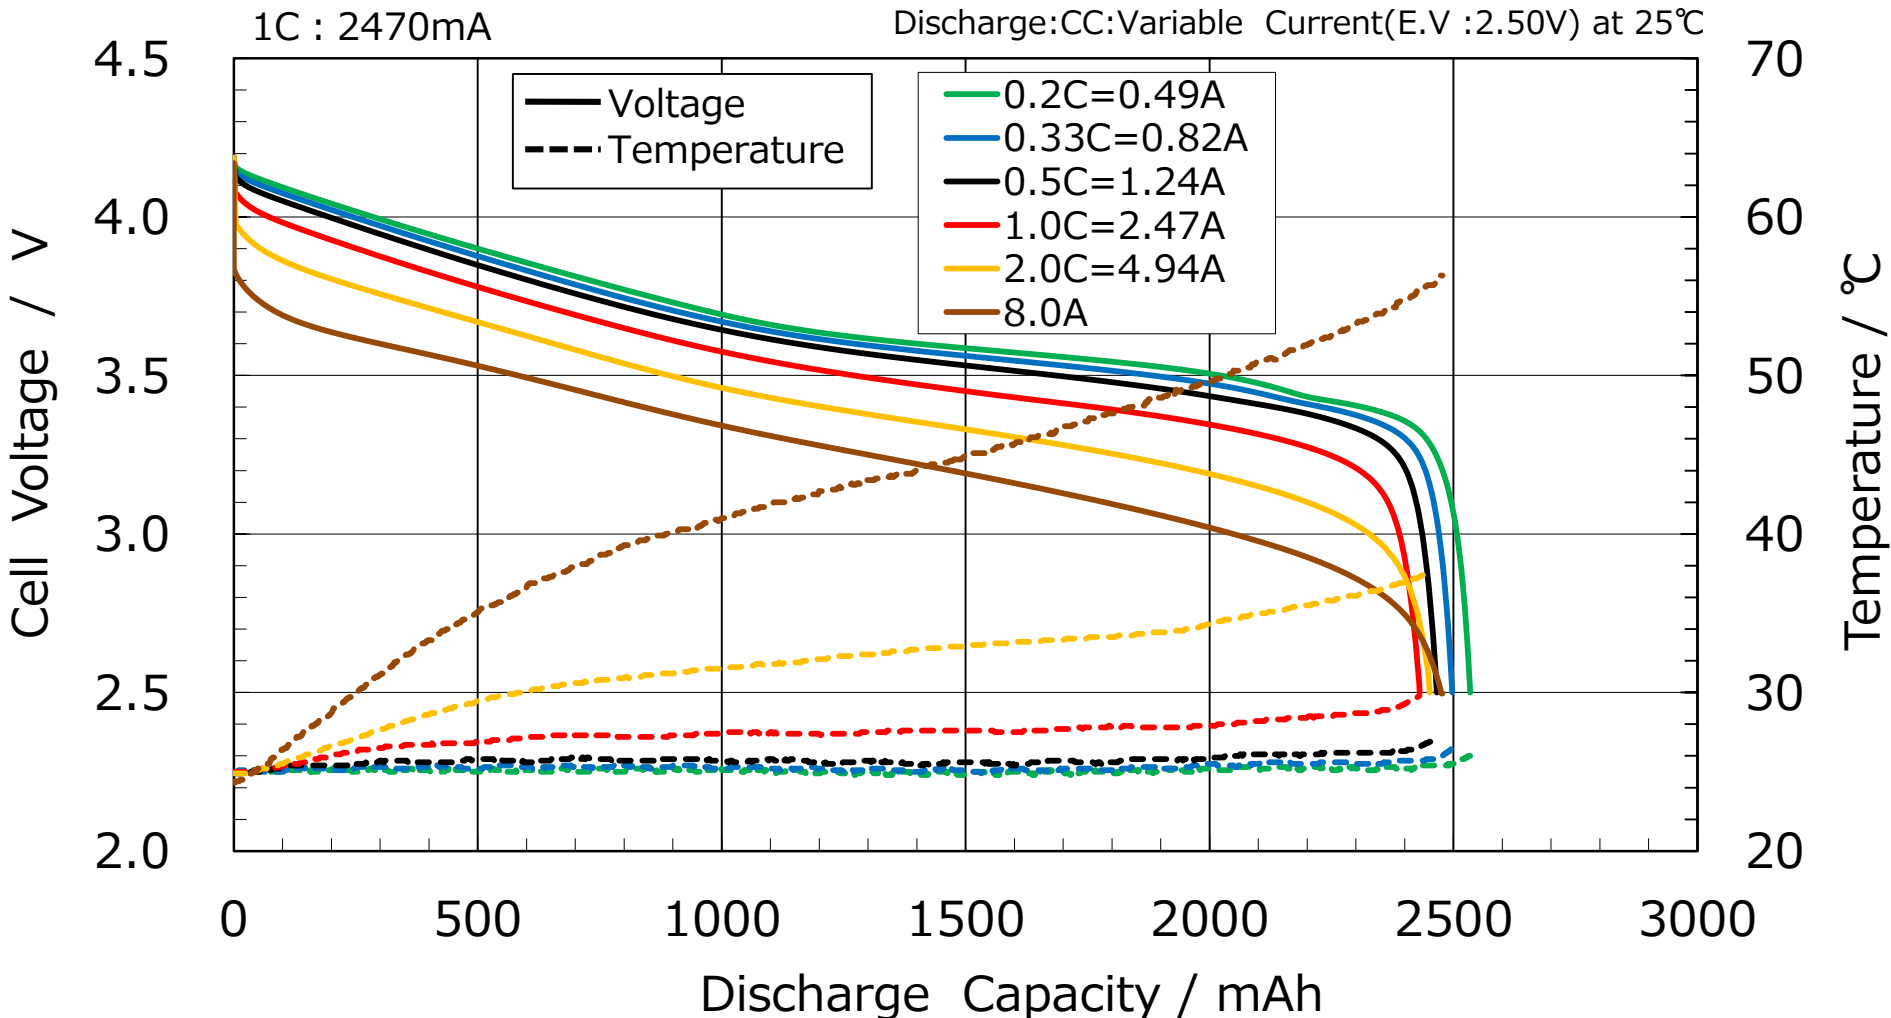


TENTATIVE

Charge:CC-CV:1240mA-4.2V(49mA cut) at 25°C


Discharge:CC:2470mA(E.V :2.50V) at each temperature

1C : 2470mA

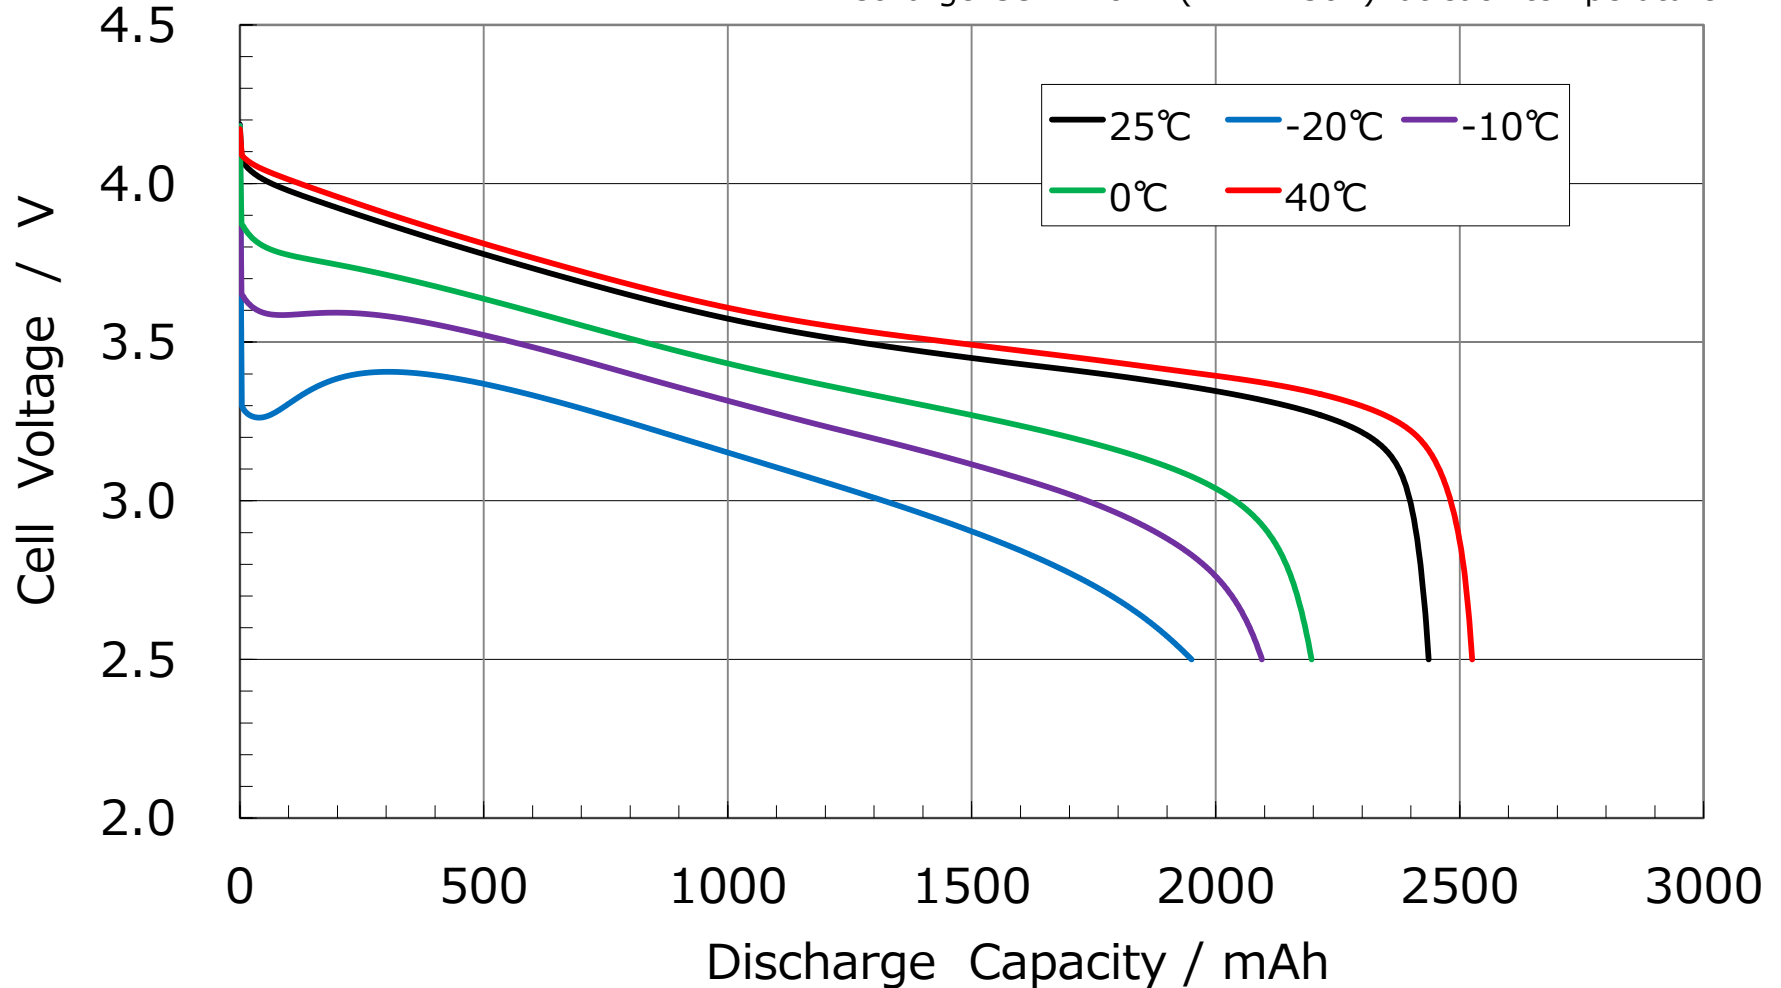


TENTATIVE


Charge: CC-CV: 1200mA-4.2V(80mAcut) at 25°C
Discharge: CC: 2400mA(E.V: 2.50V) at 25°C

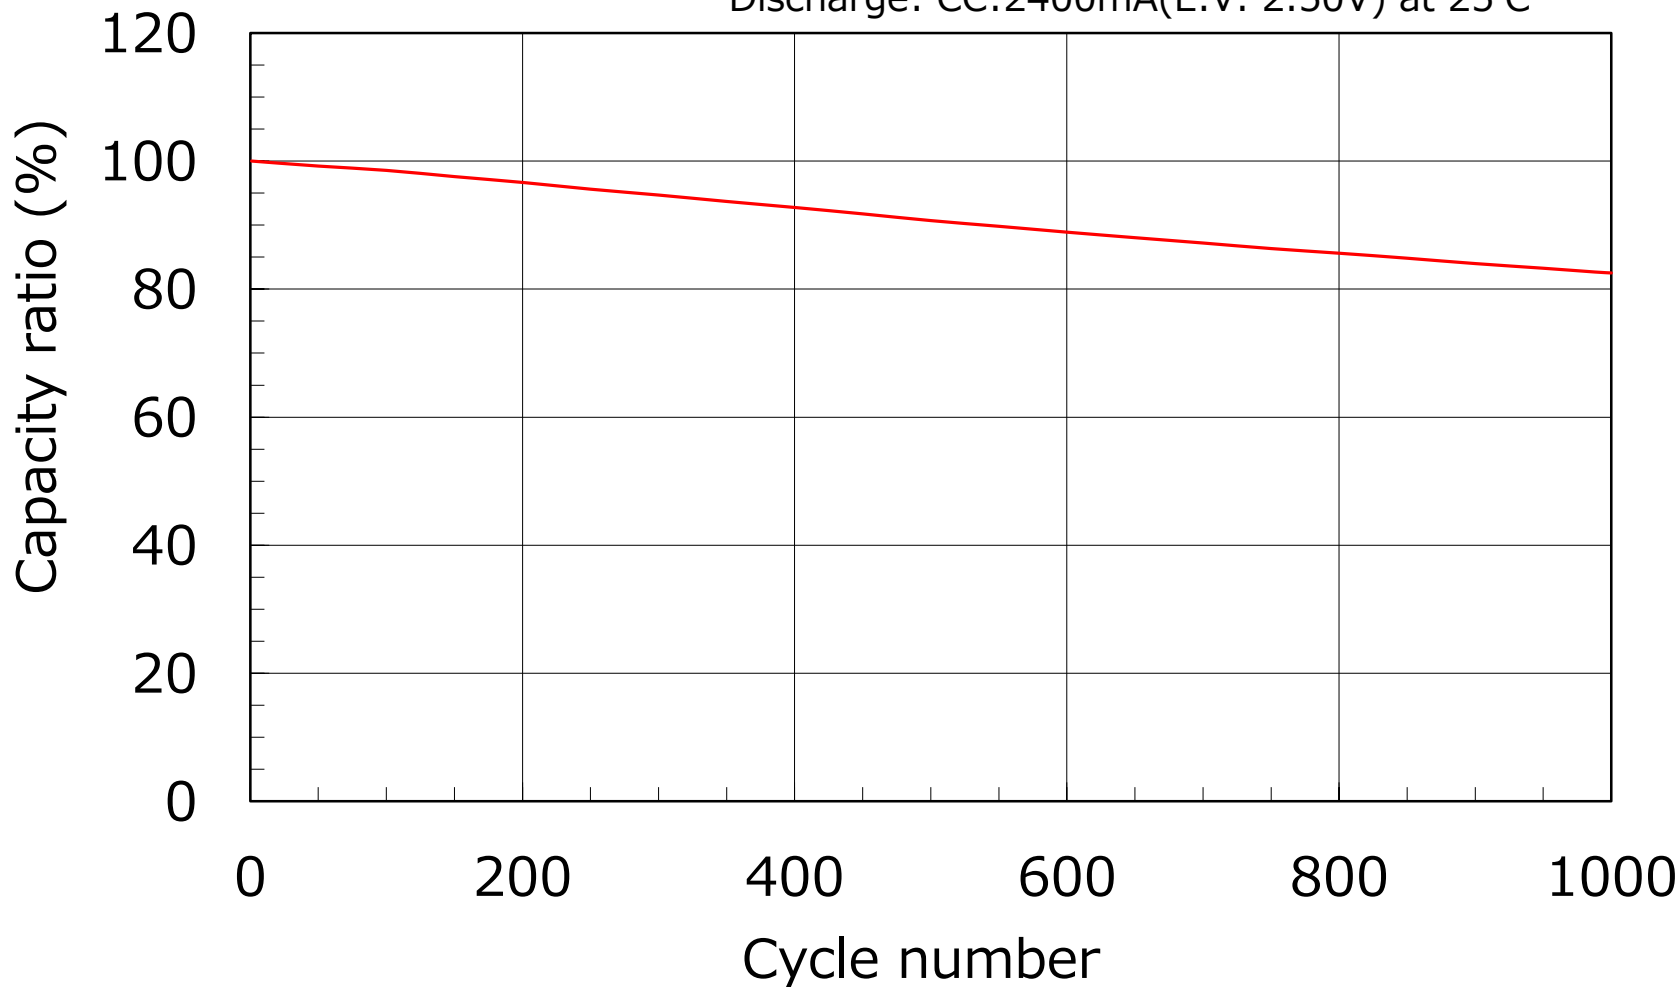


<SOC 100%>

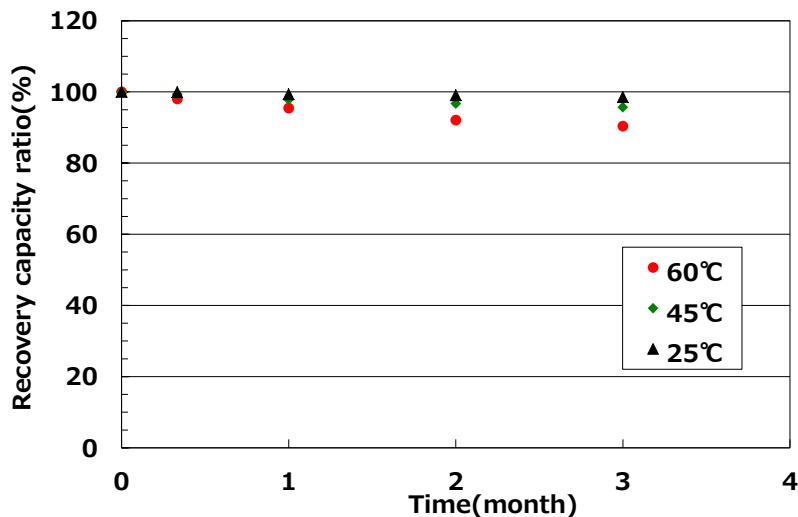

<SOC 30%>

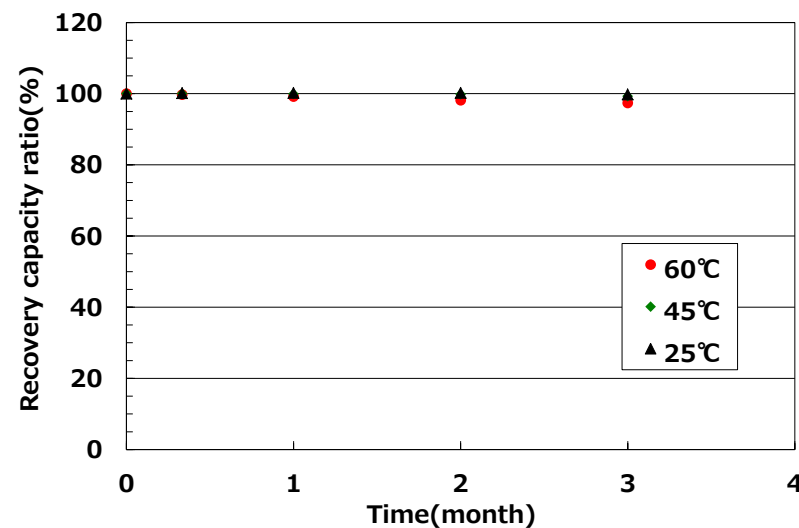

<SOC 10%>

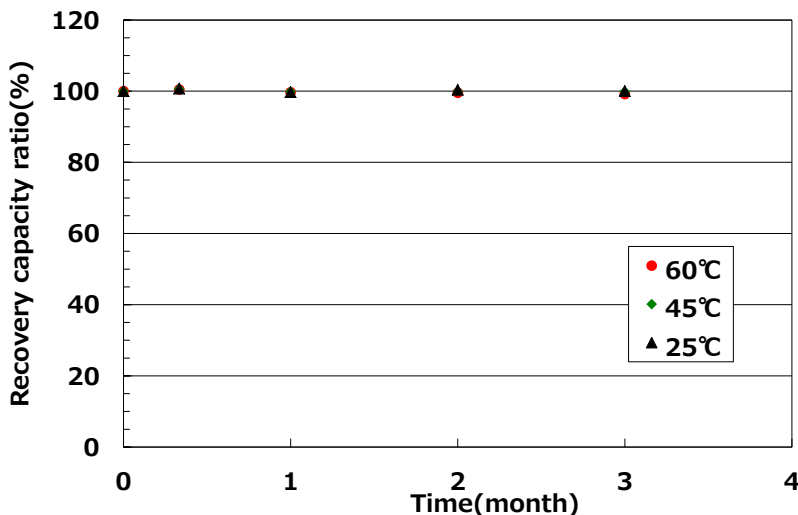

<Test condition>

- Charge:CC-CV:1200mA to Each SOC at 25°C
- Storage: At each ambient temperature for each storage time
- Recovery capacity measurement:
 Charge:CC-CV:1200mA-4.2V(80mAcut) at 25°C
 Discharge: CC:494mA(E.V: 2.50V) at 25°C

TENTATIVE

Panasonic